


# NN 4040HD

RUGGED. MARITIME. GYRO-STABILIZED. LOW MAINTENANCE

*Best Uncooled Thermal Imaging Performance for longest Range*

NN 4000 Series

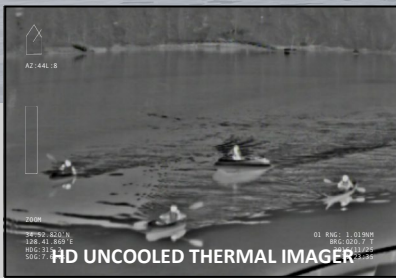

## Electro-Optical/Infra-Red camera system

### *c/w Full HD Uncooled Thermal Imager & Day Camera*

The Night Navigator™ 4040 is a rugged, low maintenance, compact electro-optical system designed for yachts, commercial, leisure and paramilitary end users. Mast mounted payload, this imaging system offers exceptional performances. It integrates a **High-Definition LWIR uncooled thermal imager** and a **HD day camera / low light** in a **gyro-stabilized** sensor platform. It can be controlled from the bridge of a ship or through IP network in a control room or remote location. This COTS system is built to MIL Std.

## APPLICATIONS

- Safe navigation at night and in uncharted waters
- Safety and security at anchor and in the harbour
- Tracking of potential threat or man overboard
- Situational awareness
- Unmanned Surface Vessels operation
- Autonomous Vessels
- Maritime SAR
- Anti-smuggling operations
- ISR (Intelligence, Surveillance and Reconnaissance)
- EEZ (Exclusive Economic Zone) protection
- Long-Range Surveillance

## BENEFITS

- **Rugged, marine, low maintenance** design
- **Zooms 24x** in LWIR uncooled thermal and 360x in HD day
- **Detects** a NATO target over 10km, night and day
- **Provides a clear, highly detailed image**, in HD day, even into the digital zoom range
- **Increases object detection** in low level of light with best of class low light sensitivity
- **Tracks** Radar cursor, ARPA Target, AIS and video targets
- **Streams H.264** (HD) video with PiP or two video streams and **communicates digitally** over IP network (Ethernet)
- **Outputs video in dedicated coax cable to the bridge in SDI**
- **Enables Picture in Picture (PiP)** of two live video signal outputs (zoom synchronized or independent)
- **Single payload** with no junction boxes or interface modules simplifies installations and retro fits, while reducing maintenance
- **Standard mounting and cabling** for all Night Navigator 4000 series enables ease of payload swaps and future upgrades
- **Designed to withstand marine environmental conditions** and proven by over 15 years and hundreds of successful operating installations worldwide

CURRENT Scientific Corporation – Tel: +1 604 461 5555 – sales@currentcorp.com

[www.currentcorp.com](http://www.currentcorp.com)



CURRENT

# NN 4040HD

## SYSTEM FEATURES

|   |   |
|---|---|
| <b>THERMAL CAMERA</b>   | <b>HIGH DEFINITION</b>  |
| Spectral range:   | 8 – 14 $\mu\text{m}$ Uncooled thermal imager                              |
| Sensor type:  | HD LWIR (Microbolometer)  |
| Resolution:   | 1024x768 pixels (outputted as 1920x1080 pixels)                           |
| Field of View:  | 41° (wide) to 6.6° (narrow)   |
| Zoom:   | 6x continuous optical, 4x digital zoom                                    |
| Frequency:  | 30 fps, full frame rate for export  |
| Detection range <sup>1</sup> :  | NATO target over 10km / Human over 4km                                    |
| <b>DAY / LOW LIGHT CAMERA</b>   | <b>HIGH DEFINITION</b>  |
| Sensor type:  | 1/2.8" CMOS   |
| Field of View:  | 63° to 2.3° FoV in HD mode, 1080p30                                       |
| Optical zoom:   | 30x continuous  |
| Digital zoom:   | 12x continuous  |
| Window coating:   | Hydrophobic   |
| <b>LOW LIGHT HD CAMERA (FUNCTION)</b>   |   |
| Sensor type:  | 1/2.8" CMOS   |
| Low light sensitivity:  | 0.0015 Lux in B&W mode  |
| <b>RADAR CURSOR, ARPA &amp; AIS TARGET TRACKING</b>   |   |
| Slew-to-cue allows target detected from the Radar and AIS to be tracked automatically by the EO/IR. Interface between Radar and AIS over NMEA0183 communication standard in RS232 or RS422, through supplied Network Interface Box. Ship GPS data is also fed through NMEA 0183 communication to register and display the ship's position in Latitude, Longitude, Date, Time and Speed over Ground. Radar target info displayed in videos (ARPA Target, Range and Bearing).   |   |
| <b>VIDEO TRACKING</b>   |   |
| Automatic pursuit of an object of interest or threat selected on the display by the operator, without any continuous input. Both the infrared and day sensors automatically track the target, even with small obstructions in their path.   |   |
| <b>CONTROLLER: HARDWARE OR GUI, IP BASED AND REMOTE-CONTROLLED SOLUTIONS (OPTIONS)</b>  |   |
| <ol style="list-style-type: none"> <li><b>1. Video GUI</b> (with optional USB joystick / Rugged Rigid Grip): video and control combined on panel PC / Laptop.</li> <li><b>2. Control GUI (Graphical User Interface)</b>, either on <b>dedicated touchscreen</b> display (Panel PC) or as pop up window in PC; with optional USB joystick / Rugged Rigid Grip.</li> <li><b>3. Compact controller</b> integrating joystick and 2.4" display for orientation &amp; troubleshooting.</li> <li><b>4. Protocol for interface to Command &amp; Control System</b></li> </ol> |   |
| All controllers offer Built-in Test for remote diagnostic and are configured for optional additional controllers, remote control, and autonomous navigation.  |   |
| <b>PAYLOAD SPECIFICATIONS</b>   |   |
| System type:  | 3 axis gyro stabilization <sup>2</sup> c./w. enhanced video stabilization |
| Pan Range:  | Continuous 360° AZ rotation   |
| Tilt range:   | +/-90° elevation movement, including stow position                        |
| Colour:   | Matterhorn White - gloss. Alexseal T9123. Custom colour upon request.     |
| <b>SYSTEM INTERFACE</b>   |   |
| Video format:   | SDI   |
| Video streaming:  | H.264 in HD with PiP or 2 video streams accessed via net0 and net1        |
| Data:   | Radar cursor / ARPA target / AIS over NMEA 0183 via RS422 or RS232        |
| Control:  | Over IP network   |
| <b>ENVIRONMENTAL</b>  |   |
| Ingress Protection Mark:  | IP67  |
| Compliant to:   | MIL-STD 810 & MIL-STD 461   |
| Operational temperature:  | -20°C to +55°C  |
| <b>WEIGHT AND DIMENSIONS</b>  |   |
| Weight:   | ≤32kg   |
| Diameter payload <sup>3</sup> :   | 330mm   |
| Height payload <sup>3</sup> :   | 521mm   |
| <b>POWER REQUIREMENTS</b>   |   |
| Voltage:  | 24 to 36VDC   |
| Max. Consumption:   | 330W  |
| <b>OTHER OPTIONS AND ACCESSORIES</b>  |   |
| Other sensors: Contact us with your specific requirements.  |   |


<sup>1</sup> theoretical calculation using Johnson's criteria & not accounting for atmospheric conditions/ <sup>2</sup> resolved by 2 axis positioning / <sup>3</sup> Larger movement space required



## CONTROL SOLUTIONS



### 1. Video GUI



### 2. Control GUI



### 3. Compact Controller



### 4. Protocol for interface to Command & Control System



2-Button Joystick

Rugged Rigid Grip



**CURRENT**

CURRENT Scientific Corporation – 2933 Murray Street, Port Moody, BC, V3H 1X3, CANADA

Tel: +1 604 461 5555 – sales@currentcorp.com – [www.currentcorp.com](http://www.currentcorp.com)