
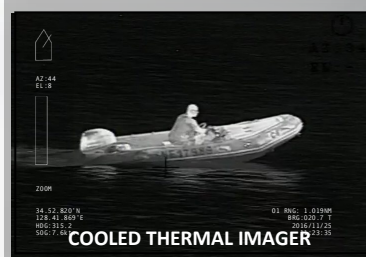


NN 4465

RUGGED. MARITIME. GYRO-STABILIZED. LOW MAINTENANCE

c/w NON-LETHAL DETERRENT Laser Dazzler

NN 4000 Series

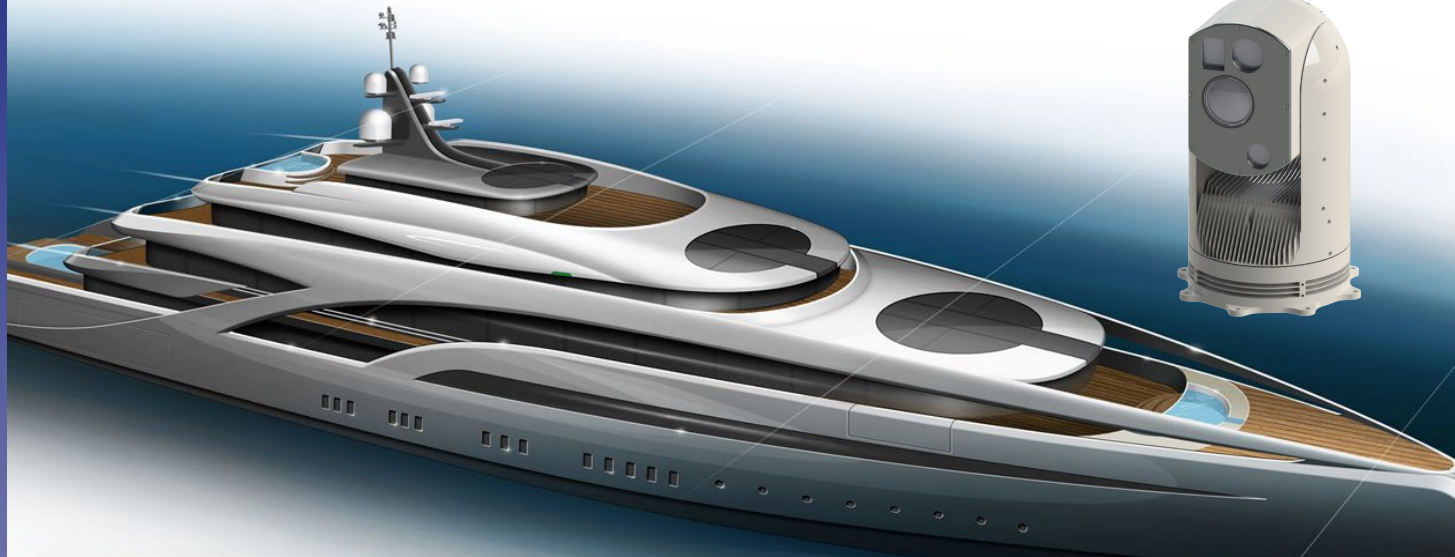

COOLED THERMAL IMAGER



HD DAY



LASER DAZZLER + LRF



LOW LIGHT

Electro-Optical/Infra-Red camera system

c/w NON-LETHAL DETERRENT Laser Dazzler

The Night Navigator™ 4465 is a rugged, low maintenance, compact electro-optical system designed for yachts, commercial, leisure and paramilitary end users. Most mounted payload, this imaging system offers exceptional performances. It integrates a **MWIR cooled thermal imager**, a **HD day camera / low light** and a **NON-LETHAL DETERRENT Laser Dazzler** in a **gyro-stabilized** sensor platform. It can be controlled from the bridge of a ship or through IP network in a control room or remote location. This COTS system is built to MIL Std.

APPLICATIONS

- Safe navigation at night and in uncharted waters
- Safety and security at anchor and in the harbour
- Tracking of potential threat or man overboard
- Situational awareness
- Unmanned Surface Vessels operation
- Autonomous Vessels
- Maritime SAR
- Anti-smuggling operations
- ISR (Intelligence, Surveillance and Reconnaissance)
- EEZ (Exclusive Economic Zone) protection
- Long-Range Surveillance

BENEFITS

- **Rugged**, marine, **low maintenance** design
- **Zooms 80x** in Cooled Thermal and **360x** in HD day
- **Detects** a NATO target over **15km**, night and day
- **Provides a clear, highly detailed image**, in HD day, even into the digital zoom range
- **Increases object detection** in low level of light with best of class low light sensitivity
- **Measures** the distance to target with the Integrated Laser Range Finder
- **Delays, denies, and defeats potential threat** with the high power non-lethal green Laser Dazzler, integrated into the payload for optimized convergence of sensors activity
- **Tracks** Radar cursor, ARPA Target, AIS and video targets
- **Streams H.264** (HD) video with PiP or two video streams and **communicates digitally** over IP network (Ethernet)
- **Outputs video in dedicated coax cable to the bridge in SDI**
- **Enables Picture in Picture (PiP)** of two live video signal outputs (zoom synchronized or independent)
- **Single payload** with no junction boxes or interface modules simplifies installations and retro fits, while reducing maintenance
- **Standard mounting and cabling** for all Night Navigator 4000 series enables ease of payload swaps and future upgrades
- **Designed to withstand marine environmental conditions** and proven by over 15 years and hundreds of successful operating installations worldwide

CURRENT Scientific Corporation – Tel: +1 604 461 5555 – sales@currentcorp.com

www.currentcorp.com

NN 4465

SYSTEM FEATURES

THERMAL CAMERA	
Spectral Range:	3 – 5 μm Cooled thermal imager
Sensor type:	MWIR (InSb FPA)
Resolution:	640x512 pixels
Field of View:	30° (wide) to 1.8° (narrow)
Zoom:	20x continuous optical, auto-focus
Frequency:	30 fps, full frame rate for export
Detection Range ¹ :	NATO target over 15km / Human over 6km
DAY / LOW LIGHT CAMERA	
Sensor type:	1/2.8" CMOS
Field of View:	63° to 2.3° FoV in HD mode, 1080p30
Optical zoom:	30x continuous
Digital zoom:	12x continuous
Window coating:	Hydrophobic
LOW LIGHT HD CAMERA (FUNCTION)	
Sensor type:	1/2.8" CMOS
Low light sensitivity:	0.0015 Lux in B&W mode
LASER RANGE FINDER	
Laser Safety Class	Class 1 Eyesafe
Measuring range:	5km (NATO target at 2400m)
Precision:	<1m
LASER DAZZLER	
Laser Power:	5000mW
Wavelength:	520 nanometers
Beam Diameter:	3 meters @ 500 meters (beam divergence 6 mrad in full angle)
RADAR CURSOR, ARPA & AIS TARGET TRACKING	
Slew-to-cue allows target detected from the Radar and AIS to be tracked automatically by the EO/IR. Interface between Radar and AIS over NMEA0183 communication standard in RS232 or RS422, through supplied Network Interface Box. Ship GPS data is also fed through NMEA 0183 communication to register and display the ship's position in Latitude, Longitude, Date, Time and Speed over Ground. Radar target info displayed in videos (ARPA Target, Range and Bearing).	
VIDEO TRACKING	
Automatic pursuit of an object of interest or threat selected on the display by the operator, without any continuous input. Both the infrared and day sensors automatically track the target, even with small obstructions in their path.	
CONTROLLER: HARDWARE OR GUI, IP BASED AND REMOTE-CONTROLLED SOLUTIONS (OPTIONS)	
<ol style="list-style-type: none"> 1. Video GUI (with optional USB joystick / Rugged Rigid Grip): video and control combined on panel PC / Laptop. 2. Control GUI (Graphical User Interface), either on dedicated touchscreen display (Panel PC) or as pop up window in PC; with optional USB joystick / Rugged Rigid Grip. 3. Compact controller integrating joystick and 2.4" display for orientation & troubleshooting. 4. Protocol for interface to Command & Control System All controllers offer Built-in Test for remote diagnostic and are configured for optional additional controllers, remote control, and autonomous navigation.	
PAYLOAD SPECIFICATIONS	
System type:	3 axis gyro stabilization ² c./w. enhanced video stabilization
Pan Range:	Continuous 360° AZ rotation
Tilt range:	+/-90° elevation movement, including stow position
Colour:	Matterhorn White - gloss. Alexseal T9123. Custom colour upon request.
SYSTEM INTERFACE	
Video format:	SDI
Video streaming:	H.264 in HD with PiP or 2 video streams accessed via net0 and net1
Data:	Radar cursor / ARPA target / AIS over NMEA 0183 via RS422 or RS232
Control:	Over IP network
ENVIRONMENTAL	
Ingress Protection Mark:	IP67
Compliant to:	MIL-STD 810 & MIL-STD 461
Operational temperature:	-20°C to +55°C
WEIGHT AND DIMENSIONS	
Weight:	≤32kg
Diameter payload ³ :	330mm
Height payload ³ :	521mm
POWER REQUIREMENTS	
Voltage:	24 to 36VDC
Max. Consumption:	330W
OTHER OPTIONS AND ACCESSORIES	
Other sensors: Contact us with your specific requirements.	


¹ theoretical calculation using Johnson's criteria & not accounting for atmospheric conditions / ² resolved by 2 axis positioning / ³ Larger movement space required



CONTROL SOLUTIONS



1. Video GUI



2. Control GUI



3. Compact Controller



4. Protocol for interface to Command & Control System



2-Button Joystick

Rugged Rigid Grip



CURRENT

CURRENT Scientific Corporation – 2933 Murray Street, Port Moody, BC, V3H 1X3, CANADA

Tel: +1 604 461 5555 – sales@currentcorp.com – www.currentcorp.com